

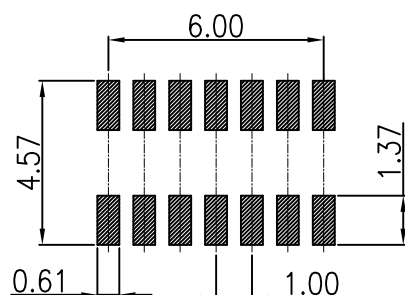



REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		MASS-PRODUCTION	03/13/2020	James

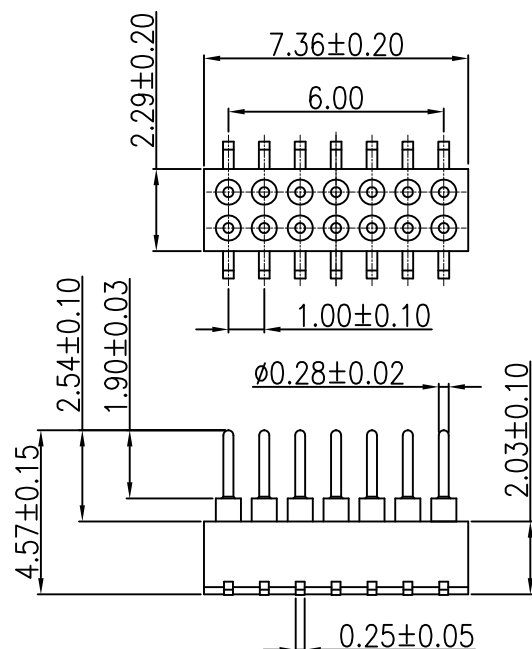

PCB LAYOUT
TOLERANCE ± 0.05

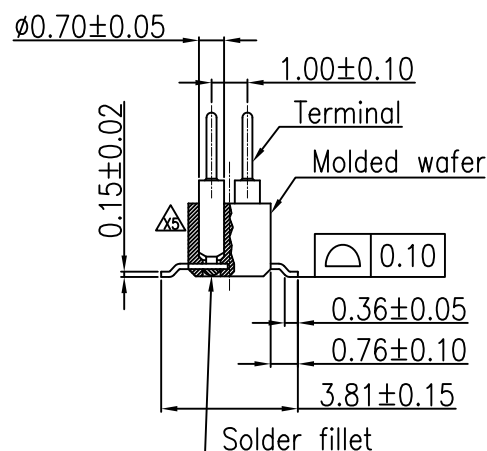

△The planting ball should be full



Matting Height

NOTES:
MATERIAL:

1. HOUSING: LCP,UL 94V-0. COLOR:BLACK
2. PIN(CONTACT): COPPER ALLOY.

PLATED:


1. CONTACT AREA : PLATING GOLD 0.38 MICROMETERS MIN OVER 1.27~2.54 MICROMETERS NICKEL.
2. SOLDER NAIL: PLATING MATTE TIN 2.54~5.08 MICROMETERS OVER 1.27~2.54 MICROMETERS NICKEL.

ELECTRICAL

1. CURRENT RATING:1A.
2. VOLTAGE RATING:250V DC/AC.
3. CONTACT RESISTANCE:20 mΩ MAX.
4. INSULATION RESISTANCE:5000MΩ MIN.
5. DIELECTRIC VOLTAGE:500V AC/1MINUTE.
6. TEMPERATURE RISE:30°C MAX

ENVIRONMENTAL:

1. OPERATION TEMPERATURE:-40°C~+105°C.
2. REFLOW SOLDERING:260°C±5°C,30S.
3. ENVIRONMENTAL REQUIREMENT:ACCORDING TO RoHS STANDARD.



TOLERANCE UNIT(mm)		APPROVALS		DATE	CSG Industrial Co.,Ltd http://www.csg-china.com					
X.	±0.30	DRAWN Nio		03/13/2020	TITLE 1.0 PITCH SMT Vertical Angle Wafer 14PIN H2.03					
X.X	±0.25	CHECKED James		03/13/2020						
X.XX	±0.15	APPROVED James		03/13/2020						
X.XXX	±0.10				SCALE N.A.	PART NO.		DRAWING NO.		REV.
ANGULAR	±2°				SHEET 1 OF 1	B1000VS207AALPG2B0001		B1000VS207AALPG2B0001 A		A
UNLESS OTHERWISE SPECIFIED		UNIT		MM	CUSTOMER CODE			CUSTOMER PART NO.		






E529482


CUSTOMER DRAWING

REVISIONS


SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		MASS-PRODUCTION	03/13/2020	James

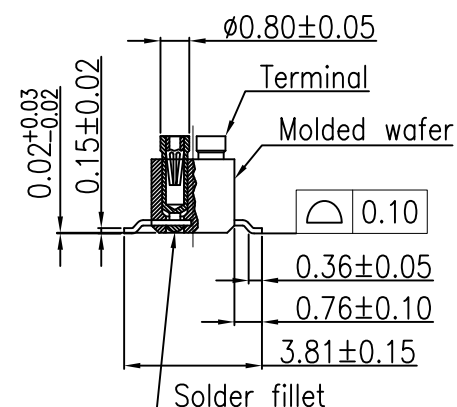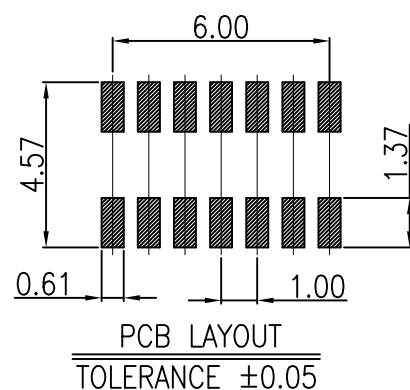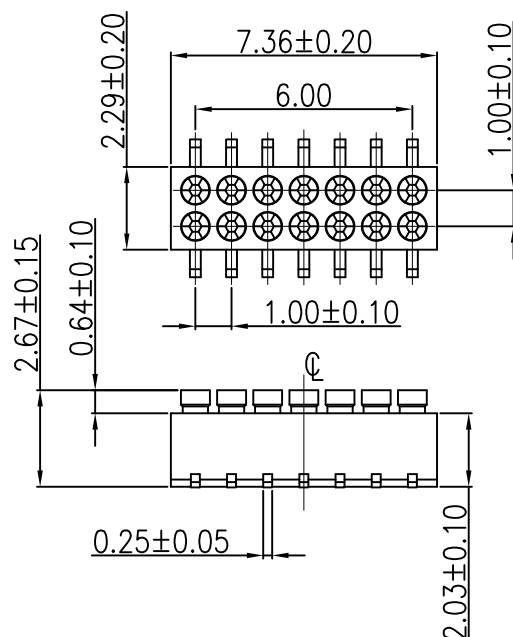

△ The planting ball should be full



Matting Height



Matting Height

NOTES:

MATERIAL:

1. HOUSING: LCP,UL 94V-0. COLOR:BLACK
2. PIN(CONTACT): COPPER ALLOY.

PLATED:


1. CONTACT: PLATING GOLD 0.0254 MICROMETERS MIN OVER 1.27~2.54MICROMETERS NICKEL. (EXCEPT CONTACT AREA).
2. CONTACT AREA : PLATING GOLD 0.38 MICROMETERS MIN OVER 1.27~2.54MICROMETERS NICKEL.
3. SOLDER NAIL: PLATING MATTE TIN 2.54~5.08 MICROMETERS OVER 1.27~2.54MICROMETERS NICKEL.

ELECTRICAL

1. CURRENT RATING:1A.
2. VOLTAGE RATING:250V DC/AC.
3. CONTACT RESISTANCE:20 mΩ MAX.
4. INSULATION RESISTANCE:5000MΩ MIN.
5. DIELECTRIC VOLTAGE:500V AC/1MINUTE.
6. TEMPERATURE RISE:30°C MAX

ENVIRONMENTAL:

1. OPERATION TEMPERATURE:-40°C~+105°C.
2. REFLOW SOLDERING:260°C±5°C,30S.
3. ENVIRONMENTAL REQUIREMENT:ACCORDING TO RoHS STANDARD.



TOLERANCE UNIT(mm)	APPROVALS	DATE	CSG Industrial Co.,Ltd http://www.csg-china.com			
X. ±0.30	DRAWN Nio	03/13/2020	TITLE 1.0 PITCH SMT Vertical Angle Wafer 14PIN H2.03			
X.X ±0.25	CHECKED James	03/13/2020				
X.XX ±0.15	APPROVED James	03/13/2020				
X.XXX ±0.10			SCALE N.A.	PART NO.	DRAWING NO.	REV.
ANGULAR ±2°			SHEET 1 OF 1	B1000VS207AALPG2B0002	B1000VS207AALPG2B0002 A	A
UNLESS OTHERWISE SPECIFIED		UNIT MM	CUSTOMER CODE	CUSTOMER PART NO.	DHS214-844-GG-M	






E529482


CUSTOMER DRAWING

REVISIONS

SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		MASS-PRODUCTION	05/13/2022	James

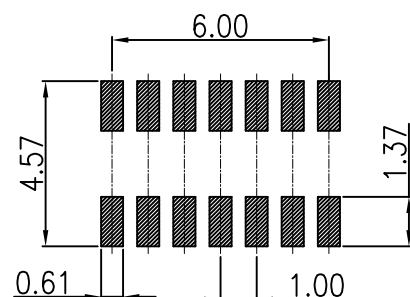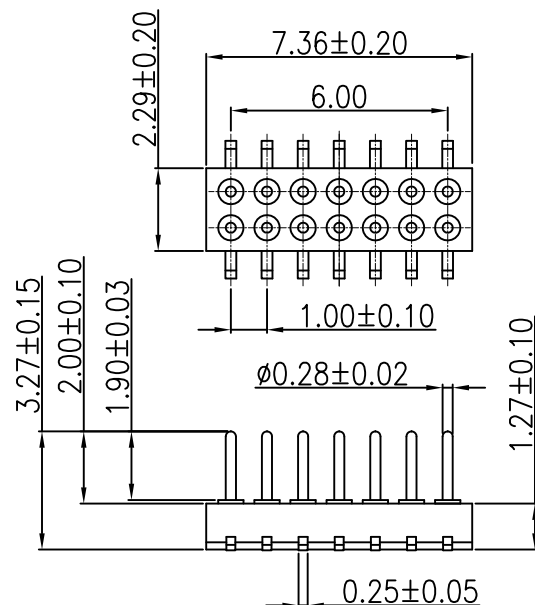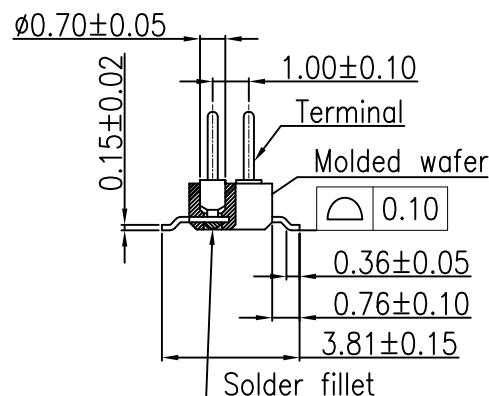PCB LAYOUT
TOLERANCE ± 0.05 

△The planting ball should be full



Matting Height

NOTES:

MATERIAL:

1. HOUSING: LCP,UL 94V-0. COLOR:BLACK
2. PIN(CONTACT): COPPER ALLOY.

PLATED:


1. CONTACT AREA : PLATING GOLD 0.38 MICROMETERS MIN OVER 1.27~2.54 MICROMETERS NICKEL.
2. SOLDER NAIL: PLATING MATTE TIN 2.54~5.08 MICROMETERS OVER 1.27~2.54 MICROMETERS NICKEL.

ELECTRICAL

1. CURRENT RATING:1A.
2. VOLTAGE RATING:250V DC/AC.
3. CONTACT RESISTANCE:20 mΩ MAX.
4. INSULATION RESISTANCE:5000MΩ MIN.
5. DIELECTRIC VOLTAGE:500V AC/1MINUTE.
6. TEMPERATURE RISE:30°C MAX

ENVIRONMENTAL:

1. OPERATION TEMPERATURE:-40°C~+105°C.
2. REFLOW SOLDERING:260°C $\pm$ 5°C,30S.
3. ENVIRONMENTAL REQUIREMENT:ACCORDING TO RoHS STANDARD.



TOLERANCE UNIT(mm)		APPROVALS		DATE		CSG Industrial Co.,Ltd http://www.csg-china.com									
X.	±0.30	DRAWN Nio		05/13/2022		TITLE 1.0 PITCH SMT Vertical Angle Wafer 14PIN H1.27									
X.X	±0.25	CHECKED James		05/13/2022											
X.XX	±0.15	APPROVED James		05/13/2022											
X.XXX	±0.10														
ANGULAR		±2°				SCALE N.A.		PART NO.		DRAWING NO.		REV.			
						SHEET 1 OF 1		B1000VS207AALPG2B0003		B1000VS207AALPG2B0003 A		A			
UNLESS OTHERWISE SPECIFIED				UNIT MM		CUSTOMER CODE				CUSTOMER PART NO.		DHAM-2-14-846-GH-M			